

# Router E2-MTC

cena od €19 300

Profesionálny router vhodný pre malé podniky.

Navrhnutý za účelom obrábania doskových materiálov, a to najmä drevotriesky, MDF, PVC, mäkkých driev, umelého dreva, kompozitných materiálov, akrylu, plexiskla, iných technických plastov a zliatin hliníka.

Stroj je vybavený aretovacími pinmi pre uľahčenie správneho upínania materiálu.



## Typ stroja

Kategória / Skupina	Router
Výrobca	Excitech
Tyč obrábania	Trieskové obrábanie


## Vlastnosti

Svetlá výška Z (mm)	200/300
Kumulatívna odchýlka (mm/m)	± 0.1
Opakovateľnosť (mm)	± 0.02
Rýchlosť (m/min)	25
Upínanie obrobku	Vákuum, T-Slot
Upínanie nástroja	MTC - Manuálna
Počet nástrojov	-
Vstupné napätie	AC380V/3PH/50Hz

## Príslušenstvo

Súprava upínačov pre nástroje
Základné nástroje
Snímač dĺžky nástroja

## Materiál

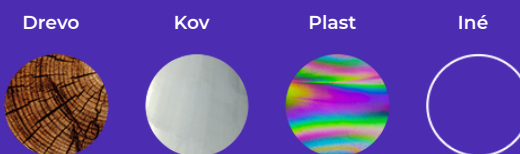

## Výbava

Riadiaci systém	NK105
Riadiaci softvér	Unacam
Vreteno	3 kW-HSD
Typ upnutia nástroja	ER32
Frekvenčný menič	Delta
Vedenia	Prizmatické (THK)
Motor a ovládač	Krokový motor
Hrebeň a pastorok	Šikmé ozubenie (Herion)
Prevodovka	Planétová (Shimpo)
Odsávanie triesky	Áno
Chladenie nástroja	Áno
Aretovacie piny	Áno
Krytovanie	Nie

## Modely

	E2-MTC-1325	E2-MTC-1530	E2-MTC-2030	E2-MTC-2040
Chod X,Y (mm)	2500x1260x200/300	3100x1570x200/300	3100x2100x200/300	4020x2100x200/300
Pracovný rozmer (mm)	2480x1240x180/280	3080x1550x180/280	3080x2050x180/280	4000x2050x180/280
Zástavbové rozmery (mm)	3150 x 1800 x 2130	3750 x 1800 x 2450	3750 x 1800 x 2950	4670 x 1800 x 2950
Hmotnosť (kg)	1250	1390	1995	2220
Vákuová pumpa	4kW Becker	2x4kW Becker	2x4kW Becker	2x4kW Becker

## Základné podmienky dodania

Záruka	2 roky
Inštalácia a školenie	Áno



# Router E2-MTC

price from €19,300

Professional router suitable for small businesses.

Designed to machine board materials, especially chipboard, MDF, PVC, softwood, artificial wood, composite materials, Acrylic, Plexiglass, other engineering plastics and aluminum alloys.

The machine is equipped with stabilizing pins to facilitate proper clamping of the machined material.



## Type

Category	Router
Brand	Excitech
Type of work	Milling


## Attributes

Z Axis stroke (mm)	200/300
X / Y axial position accuracy (mm/m)	± 0.1
X / Y axial repeated position accuracy (mm)	± 0.02
No-load max running speed (m/min)	25
Workpiece clamping	Vacuum, T-Slot
Tool clamping	MTC - Manual
Number of tools	-
Voltage	AC380V/3PH/50Hz

## Accessories

Set of tool holders	
Basic set of tools	
Auto tool sensor	

## Material

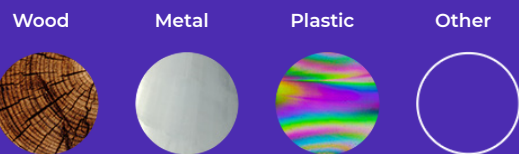

## Equipment

Control system	NK105
Control software	Unacam
Spindle type	3 kW-HSD
Tool holder type	ER32
Spindle inverter	Delta
Linear rails	Prismatic guideways (THK)
Motor and driver	Stepper motor
Rack and pinion	Helical rack (Herion)
Reducer	Planetary gearbox (Shimpo)
Exhaust fan	Yes
Oil mist system	Yes
Vacuum pump type	Yes
Pop-up pins	No

## Models

	E2-MTC-1325	E2-MTC-1530	E2-MTC-2030	E2-MTC-2040
X / Y Axis stroke (mm)	2500x1260x200/300	3100x1570x200/300	3100x2100x200/300	4020x2100x200/300
Working area (mm)	2480x1240x180/280	3080x1550x180/280	3080x2050x180/280	4000x2050x180/280
Machine dimensions (mm)	3150 x 1800 x 2130	3750 x 1800 x 2450	3750 x 1800 x 2950	4670 x 1800 x 2950
Gross weight (kg)	1250	1390	1995	2220
Vacuum pump type	4kW Becker	2x4kW Becker	2x4kW Becker	2x4kW Becker

## Basic Delivery Terms

Warranty	2 years
Installation and training	Yes

